


LVR-R Series



- Relay type
- High low voltage protection
- 10% output voltage adjustable
- Manual bypass switch
- High output efficiency
- 200% overload capacity
- Automatic bypass (option)
- Loss phase protection (option)

Demonstration

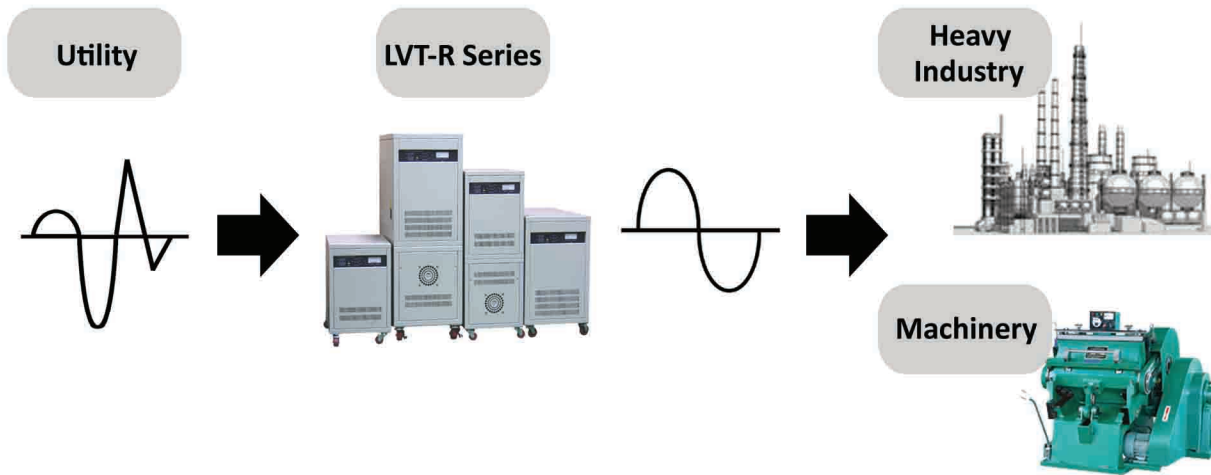

* Application to heavy industry, machinery

Technical Data

Input Voltage Range	Nominal Input Voltage ± 15%	Output Distortion	< 3%
Output Voltage Regulation	± 1 - 2%	Overload	125%: 10mins / 150%: 5mins
Output Voltage Range	Nominal Output Voltage ± 10%	Response Time	< 3 cycles
Frequency	50Hz / 60Hz ± 3Hz	Efficiency	> 97%

Specification

Without ISO Transformer

Model	Capacity	Phase	Input Voltage	Output Voltage	Dimension (W * D * H)	Weight
LVR-3310R	10KVA	Input/Output: 3P3W	200VAC 220VAC 380VAC	200VAC 220VAC 380VAC	78cm*40cm*60cm	85kgs
LVR-3315R	15KVA					95kgs
LVR-3320R	20KVA					125kgs
LVR-3330R	30KVA					150kgs
LVR-3345R	45KVA	or	or	or	83cm*50cm*65cm	195kgs
LVR-3360R	60KVA					245kgs
LVR-3375R	75KVA	Input/Output: 3P4W	110/190VAC 120/208VAC 220/380VAC	110/190VAC 120/208VAC 220/380VAC	93cm*65cm*70 cm	295kgs
LVR-33100R	100KVA					380kgs
LVR-33120R	120KVA					415kgs
LVR-33150R	150KVA					475kgs

* Product specification is subject to change without prior notice

With ISO Transformer

Model	Capacity	Phase	Input Voltage	Output Voltage	Dimension (W * D * H)	Weight
LVR-3310R	10KVA	3P3W	220VAC 380VAC	220VAC 380VAC	78cm*40cm*98cm	185kgs
LVR-3315R	15KVA					215kgs
LVR-3320R	20KVA					330kgs
LVR-3330R	30KVA					380kgs
LVR-3345R	45KVA	or	or	or	83cm*50cm*115cm	500kgs
LVR-3360R	60KVA					550kgs
LVR-3375R	75KVA	With ISO transformer	120/208VAC 220/380VAC	120/208VAC 220/380VAC	93cm*65cm*125cm	650kgs
LVR-33100R	100KVA					750kgs
LVR-33120R	120KVA					800kgs
LVR-33150R	150KVA					900kgs

* Product specification is subject to change without prior notice