


LVR-S Series



- Servo motor type
- High low voltage protection
- Loss phase protection
- With maintenance bypass switch
- Delay protection
- 150% overload capacity
- High output efficiency
- 10% output voltage adjustable

Demonstration

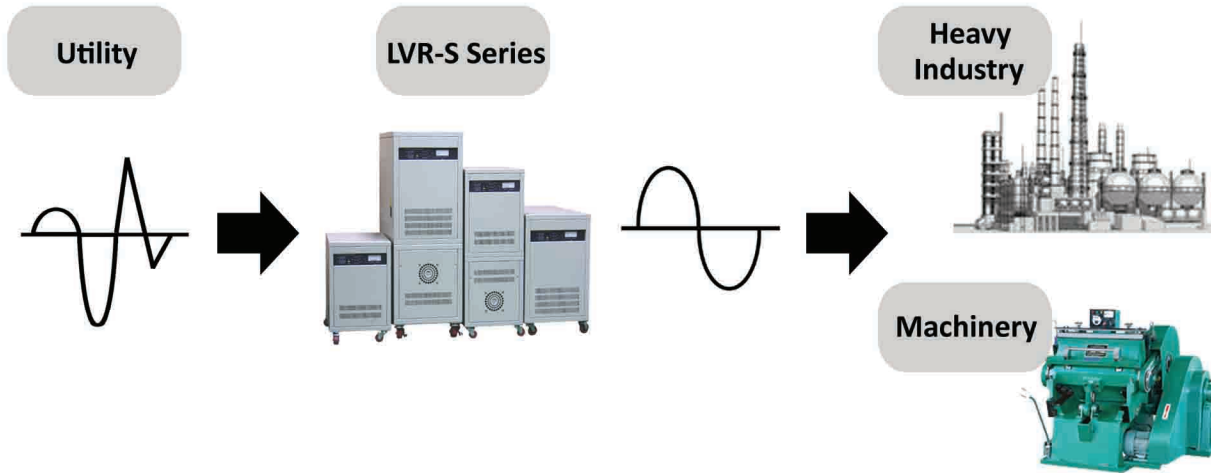

* Application to heavy industry, machinery

Technical Data

Input Voltage Range	Nominal Input Voltage ± 15%	Output Distortion	< 1%
Output Voltage Regulation	± 1%	Overload	150% for 10 seconds
Output Voltage Range	Nominal Output Voltage ± 10%	Response Time	< 0.1 second
Frequency	50Hz / 60Hz ± 3%	Efficiency	> 97%

Specification

Without ISO Transformer

Model	Capacity	Phase	Input Voltage	Output Voltage	Dimension (W * D * H)	Weigh
LVR-3310S	10KVA	Input/Output: 3P3W	220VAC 380VAC	220VAC 380VAC	63cm*40cm*62cm	75kgs
LVR-3315S	15KVA					85kgs
LVR-3320S	20KVA					95kgs
LVR-3325S	25KVA					100kgs
LVR-3330S	30KVA					105kgs
LVR-3335S	35KVA	or	or	or	83cm*50cm*76 cm	120kgs
LVR-3340S	40KVA					155kgs
LVR-3345S	45KVA	Input/Output: 3P4W	110/190VAC 120/208VAC 220/380VAC	110/190VAC 120/208VAC 220/380VAC	95cm*75cm*90 cm	165kgs
LVR-3350S	50KVA					175kgs
LVR-3360S	60KVA					195kgs
LVR-3375S	75KVA					240kgs
LVR-33100S	100KVA					310kgs
LVR-33120S	120KVA	340kgs				

* Product specification is subject to change without prior notice

With ISO Transformer

Model	Capacity	Phase	Input Voltage	Output Voltage	Dimension (W * D * H)	Weigh
LVR-3310S	10KVA	Input/Output: 3P3W	220VAC 380VAC	220VAC 380VAC	67*50*76 cm	153kgs
LVR-3315S	15KVA					190kgs
LVR-3320S	20KVA					270kgs
LVR-3325S	25KVA					300kgs
LVR-3330S	30KVA					330kgs
LVR-3335S	35KVA	or	With ISO Transformer	or	83*50*130 cm	360kgs
LVR-3340S	40KVA					400kgs
LVR-3345S	45KVA	Input/Output: 3P4W	110/190VAC 120/208VAC 220/380VAC	110/190VAC 120/208VAC 220/380VAC	95*75*155 cm	450kgs
LVR-3350S	50KVA					470kgs
LVR-3360S	60KVA					500kgs
LVR-3375S	75KVA					580kgs
LVR-33100S	100KVA					680kgs
LVR-33120S	120KVA	750kgs				

* Product specification is subject to change without prior notice